

AUSF TEMPORARY FENCE USER GUIDE

AUSF EZY Panel Temporary Fence Panel

SAFETY ALERT

This is a guide for the safe and correct installation of AUSF temporary fencing for work sites for both workers and clients.

- Keep unauthorised personnel away from site during construction
- Only competent personnel should install the temporary fencing
- Inspection of fencing must be done on a regular basis
- Ensure footings are on a hard level surface
- Do not locate closer than 1m to any slab edge, penetration or other step-down

BEFORE ERECTING TEMPORARY FENCES

- Start erecting temporary fencing at the corner or crossover to ensure gates are placed in the correct position.
- Concrete blocks **must** always run perpendicular (at 90 degrees) to the temporary fence to ensure stability. Run the temporary fence following a straight line as provided by site markings until you have fenced the area.
- Place a temporary fence clamp on the vertical pipes above the top rails of the two panels and securely fasten to ensure maximum strength and stability. All panels must be clamped together. Ensure the bolt is facing towards the centre of the site.
- The fence line shall be determined by site inspections and/or permits.
- We don't recommend the use of signs or additional windbreaks on light-duty temporary fencing (overweight shade cloth, brand signage etc)



SAFETY DO'S

DO take your time; Read this User Guide and Safety Information provided (e.g. decals, manufacturer's instructions), in its entirety, **BEFORE** assembling the equipment.

DO ensure the transport vehicle is on solid, even ground before unloading.

DO maintain distance from suspended loads & mobile plant.

DO, where possible, work away from the public & mobile or slewing plant.

DO ensure debris is removed & ground is solid, dry & even to avoid slips or trips.

SAFETY DON'TS



DON'T assemble fencing or operate any equipment if you are tired, suffering any medical condition, or under the influence of drugs or alcohol which may cause lethargy endanger yourself or others.



DON'T install unbraced panels where there is a risk of fencing moving or falling



DON'T attach signage or shade cloth on light-duty temporary fence panels






DON'T impede walkways, roadways or otherwise deviate from permits, plans or instructions

DON'T install where there is a risk of falls greater than 2m without height safety equipment

DON'T use faulty equipment or tools.


SHADE CLOTH, BANNER MESH AND SIGNAGE

- Temporary fencing panels may allow for the attaching of lightweight shade cloth for screening and dust control, banner mesh for promotional display, and safety signage on heavy-duty panels only.
- Shade cloth and banner mesh may only be installed on heavy-duty braced fencing.
- Shade cloth and mesh must be secured to the top rail of heavy-duty braced fence panels firmly with cable ties at the recommended 800mm spacing.
- It is not recommended to secure the shade cloth/banner mesh at the bottom as this will restrict airflow. Don't use shade cloth/banner during high winds.
- Safety signage should be secured on all four corners, with cable ties or wire. If using wire, tape cut wire ends to prevent cuts and abrasions.
- Assess the application and choose the right banner mesh.
- Create wind holes in the banner if necessary.**

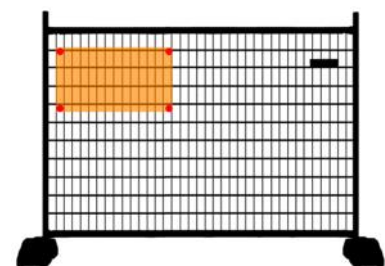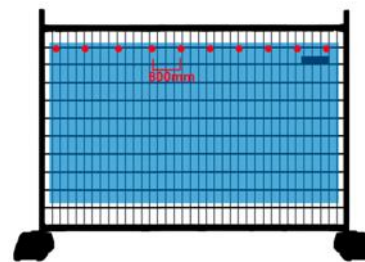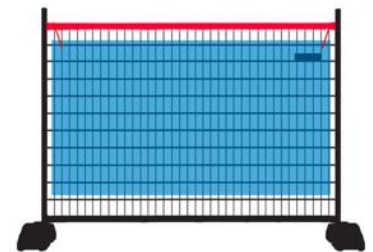

TO INSTALL

1. Place blocks approximately 2.3m apart. Ensure the blocks are on solid and level ground. Blocks should be placed at 90-degree angles to fencing.
2. Insert fencing into holes on top of blocks. Where possible the fencing should normally be placed in the middle holes of the blocks.
3. Secure each fencing panel to the next using galvanised bolted/clamped brackets provided or other appropriate bracing.

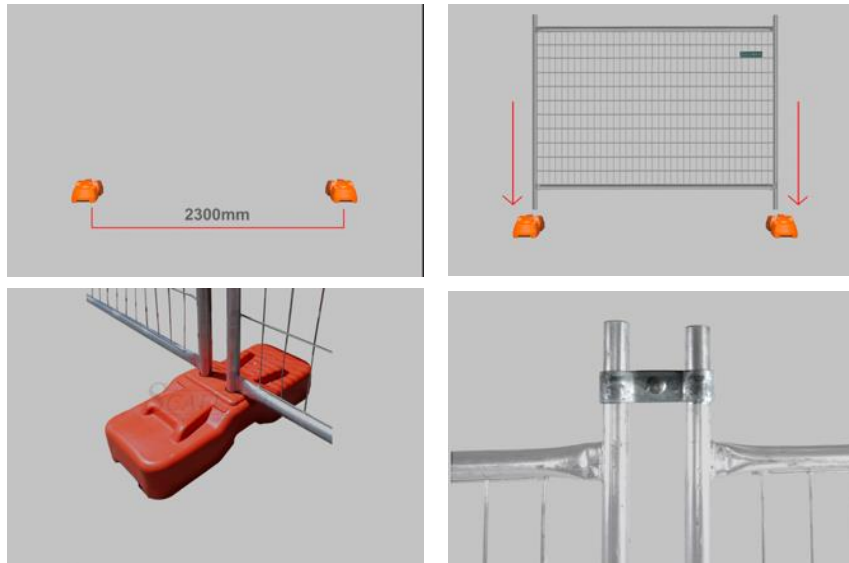

TO REMOVE OR RELOCATE

If at any time the fence system is moved or altered, it shall be done so by competent personnel.

*Australia Scaffolding & Formwork ensure all specifications and directions are wholly accurate. Contact us for further documentation, including certificates and test reports. We reserve the right to amend details without notice, due to the continuous improvement of products.