

SCAFEAST 1.8M FORMWORK STANCHIONS SYSTEM USER GUIDE






Step One

- Position the stanchion at live edge, install facing inside.

Ancor 4x ankascrews on the base into existing concrete structure.

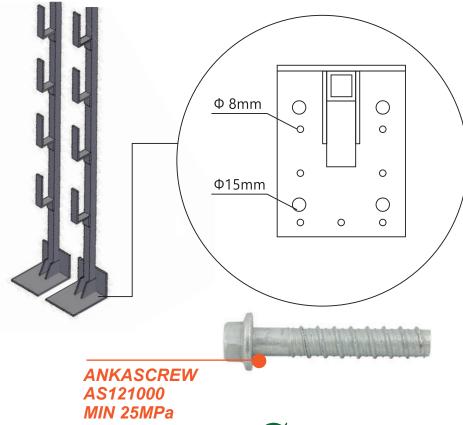





Step Two



Place the timber kickboard on the anchor points of the upright stanchion.




Fastern the kickboard with Type 17 self drilling screws.

(positions as shown)

Toeboard minimum size: 38x225mm



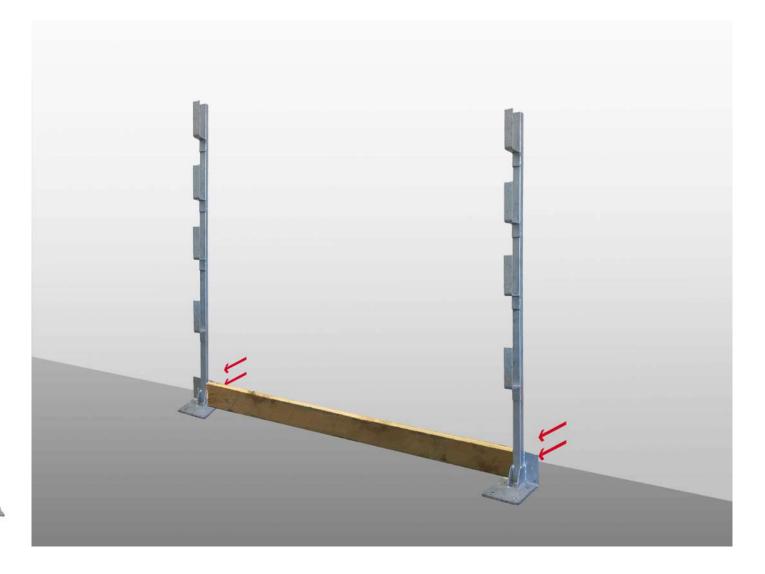






Step Three



Place the next stanchion at a distance of up to 2.4 metres and anchor hte base with screws.



Fastern the kickboard to the second stonchion with screws.

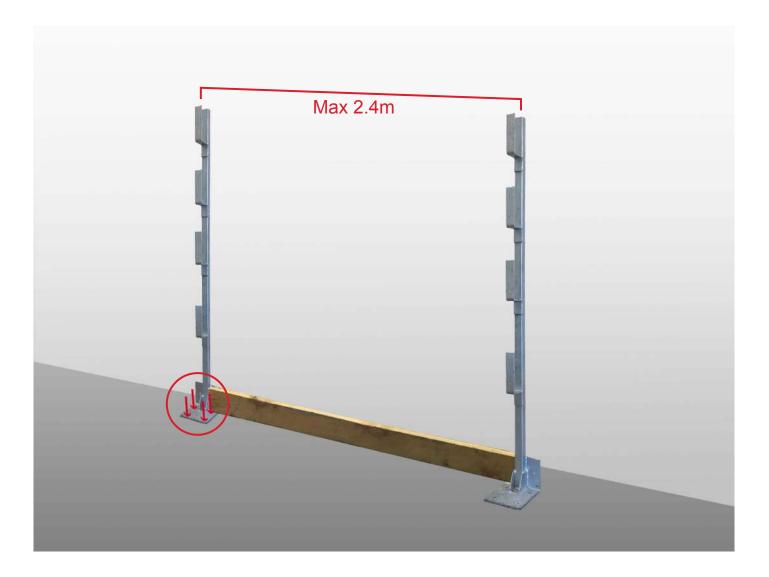





SCAFEAST 1.8M FORMWORK STANCHIONS SYSTEM

Step Four

Horizontal 4x guard bearers LVL 95x65, connect to the post by self-tapping screw bolt.














SCAFEAST 1.8M FORMWORK STANCHIONS SYSTEM

Regulation

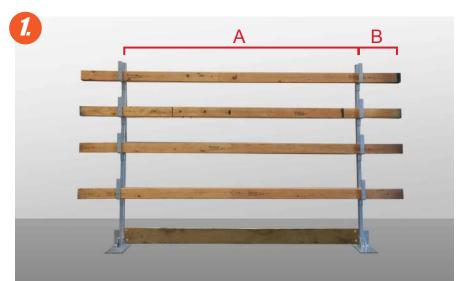

A Maximum distance between two stanchions: 2400mm

B Maximum over hang of IvI rail each side: 300mm



How to position stanchions in corners?

Scafeast stanchion system have been designed for all scenarios, please see the picture provided to shown how you position the stanchions on angle.







TRANSPORTING, STACKING AND STORING

- 1. Observe all regulations applying to the handling of formwork and scaffolding.
- 2. Remove any loose parts or fix them in place so that they cannot be dislodged or fall free.
- 3. Use SCAFEAST stillage to safely stack & transport the stanchions.

INSPECTION AND MAINTAINCE

- 1. Routine inspection has to be carried out during or after the use of the equipment, make sure this is no damage and all components works properly.
- 2. Only original SCAFEAST components may be used as spare parts.
- 3. Repairs may only be carried out by the manufacturer or authorized facilities.

We reserve the right to make alterations in the interests of technical progress.



DANDENONG SOUTH LAVERTON NORTH VILLAWOOD NSW 13B Monterey Road, Dandenong South, VIC 3175 119 Pipe Road, Laverton North , VIC, 3175 1/264 Miller Road, Villawood , NSW, 2163 1300 622 686 (03) 9317 3864 (02) 8747 1851